

WRIST STRAP TO TOOL CONNECTION

PART CODE: **WST**



**HEIGHT
SAFETY**

PRODUCT FEATURES >

- Coiled tool connector provides compact tool retention.
- Plastic coating for durability and comfort.
- 2 x Swivel Snap Hooks to reduce tangling.
- Maximum tool weight not to exceed 0.8 kg.

PRODUCT DETAILS >

- Strap Material: Stainless Steel/PE.
- Connector Material: Electroplated zinc alloy.
- Plastic Material: PE (Polyethylene).
- Weight: 40 grams.
- One size fits all.
- Maximum Working Load Limit: 0.8kg.


TOOL LANYARD INSTRUCTIONS >

- **Tether Point:** Begin with a tether point on the tool itself. As many tools don't have an attachment point for a tool lanyard, LINQ have developed tether points that can be retrofitted to any tool without causing damage or limiting its use.
- **Tool Lanyard:** There are different types of tool lanyards for different equipment, tasks and environments. Its important to assess both your tools and where they'll be used to decide which kind of lanyard is most suitable. You may want to have several types and lengths of lanyards to allow you to use your tools in various scenarios without any difficulty.
- **Anchor Point:** The anchor point needs to be just as robust as the rest of the system. For lighter tools, they can be secured to a wristband, a workbelt or to a harness worn by the worker. Heavier items should be tethered to a strong, fixed point such as a load rated rail or beam.

ACCESSORIES >

WRIST STRAP WITH D CONNECTION PART CODE: **WSD**

- Elastic wrist strap to provide tight fitting comfort.
- Velcro adhesive.
- D-ring attachment.
- Maximum tool weight not to exceed 0.58Kg.
- One size fits all.

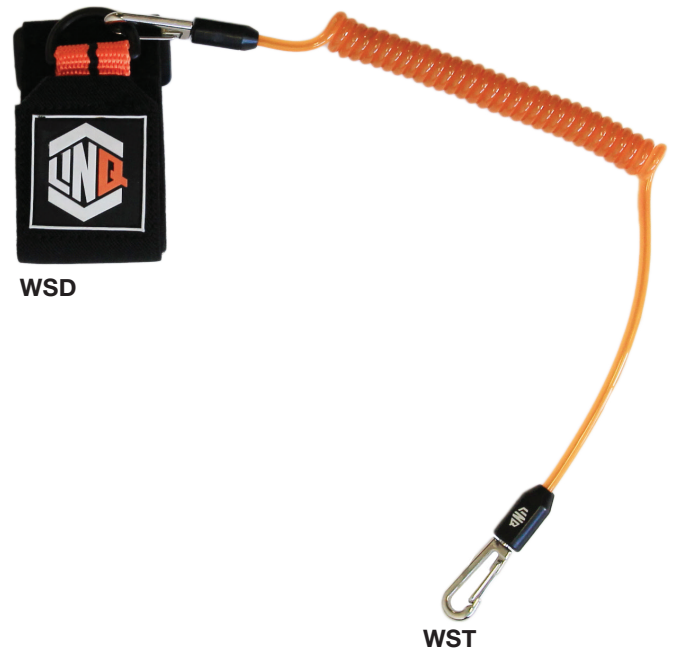

Reading of LINQ instruction manual prior to use is mandatory. Description and specification subject to change without notice. If in doubt please contact the LINQ helpline.

AUS: 1300 546 747

NZ: 0800 546 747

INTERNATIONAL: +61 1300 546 747

WWW.LINQHS.COM